ESTABLISHED 1969

Product Code: VM108

Description: Cool Touch Thermostatic Shower Mixer

Product Material: Stainless Steel/ABS

• Valve/Cartridge Type: Integrate diverter ceramic valve

• **Plumbing Systems**: Suitable for all plumbing systems, preferably balanced. Min. supply pressure differential requirement is 5:1

Water Pressure: Min 0.5 Bar – Max 6.0 Bar
Standards: Complies with BSEN 1111

• Check Valve: 0.5-10 gpm

Fitting: S-UnionsWeight: 4.45Kg/Box

Additional Info:

Temperature: Pre-set 38°C, with push button override to 48°C.

 Automatic shut off in the event of hot or cold-water supply failure.


o Shower head: Chrome, 200mm, ABS


Shower handset: Chrome, ABS

o Shower hose: 1.5m stainless steel

Riser Rail: Stainless steel adjustable riser rail



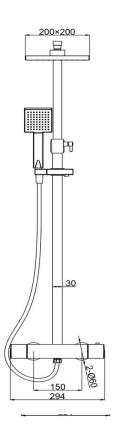

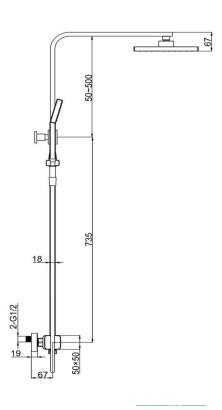

## Flow Rates (Litres per minute)

	,									
System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
VM108	2.4	3.8	-	6.7	10.9	-	-	18.2	-	-

All Dimensions are in millimetres. The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice.