


## Technical Data Information

Acumen Bathroom Mirror  
TAVAIMOXX

# R.T. LARGE

ESTABLISHED 1969

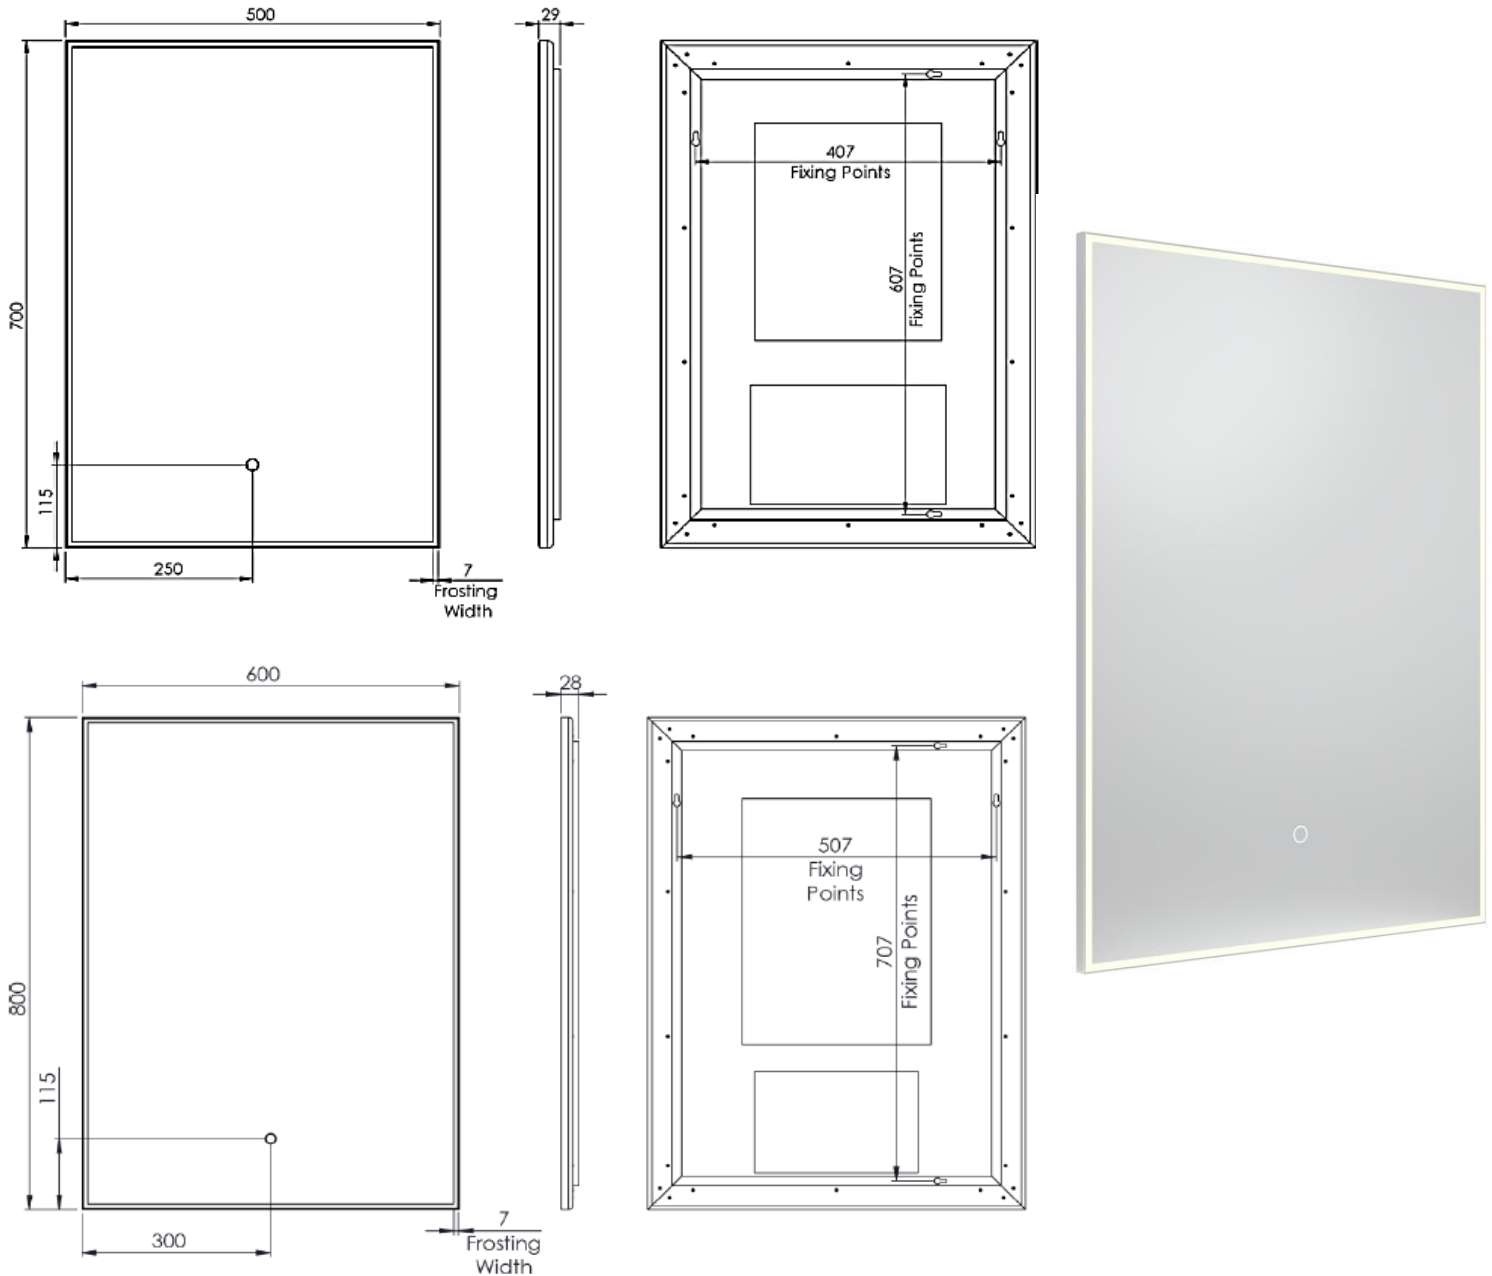

All Dimensions are in millimetres. | All Dimensions in mm have a tolerance of  $\pm 5$ mm The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice.

# R.T. LARGE

ESTABLISHED 1969

## Electrical Specification

Product Code	Input Voltage	Lamp Type	Total Wattage (LED & Demist)	Demist (W)	Demist Size (mm)	LEDs (W)	LED (lm)	Energy Rating	CCT (K)	CRI	IP Rating	Electrical Class
TAVAIM050	220-240V 50Hz	12V DC LED Lamp	37.1	13.5	250x300	23.6	2592	F	3000-6500	80	IP44	Class II
TAVAIM060	220-240V 50Hz	12V DC LED Lamp	49.2	21.6	300x400	27.6	3024	F	3000-6500	80	IP44	Class II

## INFORMATION

	Units	TAVAIM050	TAVAIM060
Can the mirror be hung landscape?	-	Yes	
What is the thickness of the mirror glass?	mm	5	
What size fuse should I use?	-	Seek the advice of an electrician	
Where is the switch sensor located?	-	Lower Centre	Lower Right
Can the LED lighting be replaced?	-	No	
Can the switch sensor be replaced?	-	Yes	
How do I turn on the demister pad?	-	The demister pad will turn on when the LEDs are turned on.	
Are illuminated mirrors supplied with mains cable?	-	All illuminated cabinets/mirrors are supplied with a removeable 500mm mains cable.	
Why are the lights not switching on?	-	Please note: After the mirror is connected to power for the first time, it may take up to 5 minutes for the sensor to calibrate and become fully responsive.	

All Dimensions are in millimetres. | All Dimensions in mm have a tolerance of  $\pm 5$ mm  
The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice.